


————— • ————— Denotes centre line of track

Panels may be parked practically anywhere providing there is sufficient space and support above the head track.
 Roller centres and position of track junctions will vary according to panel widths, panel thicknesses and the total number of panels.
 Contact our technical department for exact dimensions.

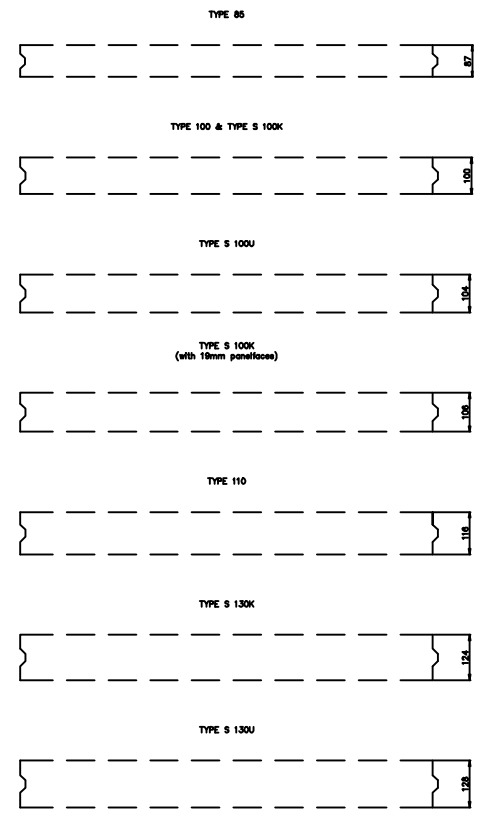

Calculate approximate panel widths as follows:
 (Gross opening width) - 200mm =
 Then divide this net width by the no. of panels required.
 The maximum panel width is 1240mm.